


Genesis Swift Call Installation Instructions

Thank you for purchasing a Genesis Nest Box Swift Call system.

When unpacked this is what you will have:

Delux system unpacked.

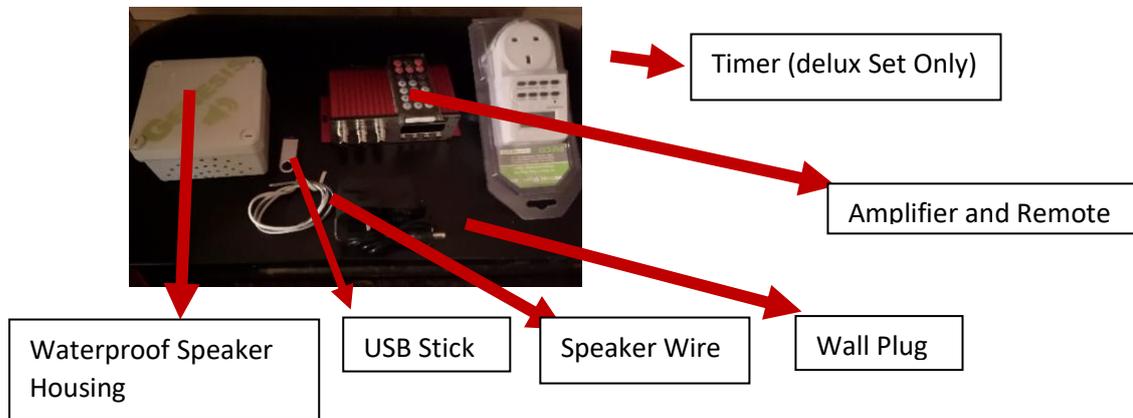

SUGGESTION: ALWAYS INSTALL BOXES NEAR A POWER OUTLET SO THAT INSTALLING A CALL SYSTEM IS ACHIEVED WITH MINIMUM FUSS.

- 1. Please do the steps below before you install the system in place so that you are sure it works - taking it down afterwards is not fun.**
2. Open the speaker box. Inside you will find a speaker and a wire with a connector on one side.
3. Press one end of the speaker wire through one of the speaker holes on the bottom left-hand side, from the outside in. Now split the wire and clean the ends.
4. Connect the wire to the connector, making sure you follow the wire colours on each side. Make sure your connection is tight and good.
5. On the other side of the speaker wire, split the wire and strip the ends.
6. Take the amplifier in a hand and look at the back. You will see a red toggle and a black toggle and the same repeated again. Each red and black toggle next to each other is a set.
7. Insert the end with the black line on the side of the stripped wire into the red toggle. If you push the toggle down a hole will appear. Insert the wire in the hole and release the toggle. Make sure connection is firm. Repeat with black toggle of the same set.
8. On the rear of the amplifier you will see an Ariel. Below this is a hole with a black frame. Insert the round end of the power source in here.
9. Plug the other side into the wall socket and switch on.
10. Now insert the USB stick on the front face of the amplifier.
11. On the front face are three dials. Left is Bass. This has to be turned to -10 always. In the middle is the treble button, this has to be turned to +10 always. The third and right button is volume and ON/OFF. Turn this to $\frac{3}{4}$ open when you switch it on.
12. The lights on the amplifier will start flashing and the screen will show Lod. The screen will switch to USB and the sound will start immediately.
13. Everything is now working, install the speaker box onto the speaker bracket and attach to the box. If you are not using a bracket screw the speaker box to the wall near the box. Replace speaker box lid.
14. Neatly tie down your wire to where the amplifier is operating.
15. Follow steps 7 – 12 and you are done.

IF FOR ANY REASON THE SOUND GOES HAYWIRE PLEASE DOWNLOAD THE CALL FROM THE WEBSITE AGAIN AND RELOAD THE USB STRICK AFRESH, IN MOST CASES THAT SHOULD FIX THE PROBLEM